

BALL VALVES - BSP

V3 Type 1/4" to 4"



3-Piece Stainless Steel AISI 316 (DIN1.4408)

Full Port, Lug Body, 1000WOG, Blow-out proofsystem.

Pipe Threads in accordance with ANSI B2.1, BS21 1973 or DIN259.

W/15%Glassfibre reinforced teflon seat and seals.

BSP Threaded Ends

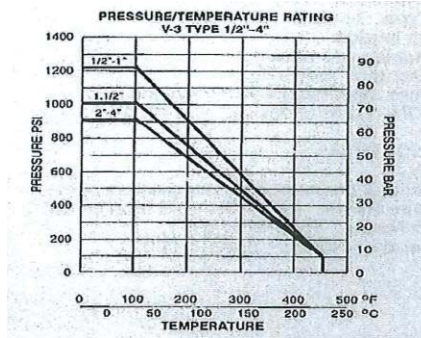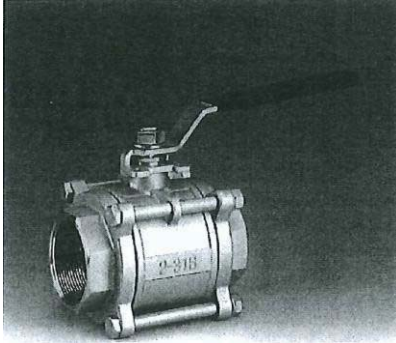

ØDN	A	L	C	H	CV FACTOR	TORQUE INCH/LBS	KG
1/4"	11.6	65	42	98	6	36	0.41
3/8"	12.7	65	42	98	7	36	0.40
1/2"	15	66	49	115	10	43	0.65
3/4"	20	83	52	115	25	65	0.80
1"	25.4	95	62	143	35	101	1.20
1 1/4"	32	111	66	143	46	158	2.05
1 1/2"	38	130	77	178	80	187	2.80
2"	50.8	151	85	178	110	230	4.35
2 1/2"	65	185	139	250	310	430	8.40
3"	80	212	150	250	360	2.200	14.50
4"	100	270	173	280	820	3.400	26.50

Ø Thread: DIN 259, BSP

NR	PART	QTY	V3-316
1	Body	1	A351 CF8M
2	Cap	2	A351-CF8M
3	Ball	1	316
4	Seat	2	15% R-PTFE
5	Steam	1	316
6	Thrust Washer	1	15% R-PTFE
7	Stem Packing	2	15% R-PTFE
8	Bolt	4	304
9	Hex Nut	4	304
10	Bolt Washer	4	304
11	Gland Nut	1	304
12	Stem Washer	1	304
13	Stem Nut	1	304
14	Handle	1	304
15	Plastic Cover	1	Plastic

